

SmartScope® CNC 1500


- **Open work area –**
Optics mounted on a moving bridge — part remains stationary and easily accessible
- **Precision optics –**
High quality AccuCentric® zoom lens automatically compensates magnification for each zoom position
- **Exclusive illumination to measure the most challenging parts –**
Standard profile light, coaxial surface light, and SmartRing™ light illuminate parts from all angles
- **Multisensor versatility –**
Optional touch probe and laser sensors

Axis	Travel (mm)
X axis	900
Y axis	1500
Z axis	200

Large XY-Travel Multisensor Dimensional Measuring System



SmartScope® CNC 1500

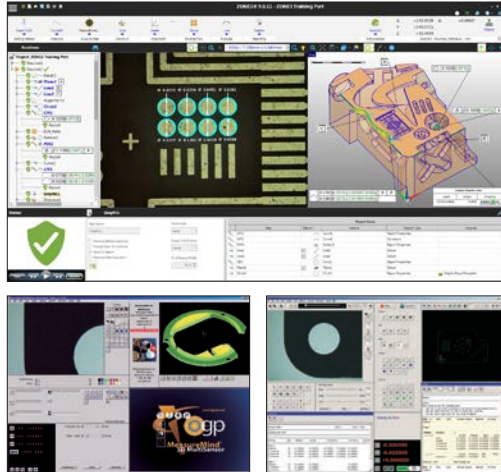

Choose the metrology software best suited to your manufacturing setting — ZONE3®, MeasureMind® 3D or Measure-X®.



System Weight: 2590 kg
Shipping Weight: 3000 kg

	Standard	Optional
XYZ Travel	900 x 1500 x 200 mm	
XYZ Scale Resolution	0.1 µm, with dual Y-axis scales	
Drive System	DC servo with 4-axis control (X,Y,Z,zoom); with multifunction handheld controller and dual Y-axis drives	
Worktable	Anodized, with fixture holes, removable stage glass, 100 kg recommended max payload	
Rotary Axis		Miniature Servo Rotary (MSR), MicroTheta Rotary (MTR)
Optics*	AccuCentric® auto-compensating zoom with up to 25 calibrated positions, 1.0x lens	Focus Grid Projector: LED Source Laser Adapter: Allows for field retrofit of TTL Laser. Includes Laser Pointer Replacement Lenses: 2.5x, 5.0x Laser Lenses: 2.0x (Included with TTL Laser), 5.0x Lens Attachments for 1.0x Lens: 0.5x, 0.75x, 1.5x, 2.0x
FOV Range	8.0 mm x 6.0 mm (low zoom) to 0.90 mm x 0.68 mm (high zoom)	14.6 mm x 10.9 mm (1.0x lens, 0.5x attachment) to 0.19 mm x 0.14 mm (5.0x lens)
Illumination	LED numerical aperture matching substage, LED coaxial TTL surface, 8 sector/8 ring SmartRing™ LED (white)	• Flexible SmartRing light for long working distance optical configurations • Red or green SmartRing light
Camera	Color digital metrology camera	
Image Processing	256 level grayscale processing with 10:1 subpixel resolution	
Sensor Options		Tactile: TP20 or TP200 Touch Probe Non-Contact: Through-the-Lens (TTL) Laser, DRS™ Laser
Controller	Windows® based, with up-to-date processor and on board networking/communication ports	
Controller Accessory Package		24" flat panel, or dual 24" flat panel LCD monitors; keyboard, 3-button mouse (or user supplied)
Software	• Choice of ZONE3 Express or Measure-X or MeasureMind 3D metrology software • QVI Portal	Metrology software: ZONE3 Prime, ZONE3 Pro Productivity software: MeasureFit® Plus, SmartFit® 3D, SmartProfile®, E-SPC Offline software: ZONE3, MeasureMind 3D, Measure-X
Power Requirements	100-120 VAC or 200-240 VAC, 50/60 Hz, 1 phase, 700 W	
Operating Environment, Safe Operation	15-30 °C	
Rated Environment	Temperature 18-22 °C, stable to ±1 °C, max rate of change 1 °C / hour, max vertical gradient of 1 °C / meter; 30-80% humidity; vibration <0.001g below 15 Hz	
XY Area Accuracy	$E_2 = (5.0 + 6L/1000) \mu\text{m}$	
Z Linear Accuracy	$E_1 = (3.0 + 8L/1000) \mu\text{m}$	

Accuracy is evaluated with a QVI verification procedure where "L" is measured length in millimeters. Specifications apply within the rated environment. Standard optical specifications apply at the maximum optical magnification of the standard configuration. XY Accuracy applies with an evenly distributed load up to 10 kg in the standard measuring plane. The standard measuring plane is defined as a plane that is within 25 mm of the worktable surface. Depending on load distribution, accuracy at maximum payload may be less than standard.

*Lenses and lens attachments can be manually interchanged to change magnification and working distance.



Confidence. When Results Matter.™

World Headquarters: Rochester, NY, USA • 585.544.0400 • www.ogpnet.com

OGP Shanghai Co, Ltd: Shanghai, China

86.21.5045.8383/8989 • www.smartscope.com.cn

OGP Messtechnik GmbH: Hofheim-Wallau, Germany

49.6122.9968.0 • www.ogpmesstechnik.de

Optical Gaging (S) Pte Ltd: Singapore • 65.6741.8880 • www.smartscope.com.sg

© 2020 Quality Vision International Inc. Specifications subject to change without notice. All rights reserved. Trademarks are the properties of their respective owners.

Export of this product is controlled under U.S. Export Regulations. An Export License may be required for deliveries or re-export outside the United States. Part Number 790832-0620