


SmartScope® Flash 200

- **Designed-in accuracy** – Elevating bridge design eliminates errors common to other designs
- **Precision optics** – High quality AccuCentric® zoom lens automatically compensates magnification for each zoom position
- **Superb illumination for the best video measurements** – Standard profile light, coaxial surface light, and SmartRing™ light illuminate parts from all angles
- **Multisensor versatility** – Optional touch probe, scanning probe, laser, and micro-probe sensors


Axis	Travel (mm)
X axis	200
Y axis	200
Z axis	150

Multisensor Dimensional Measuring System that Fits on a Benchtop

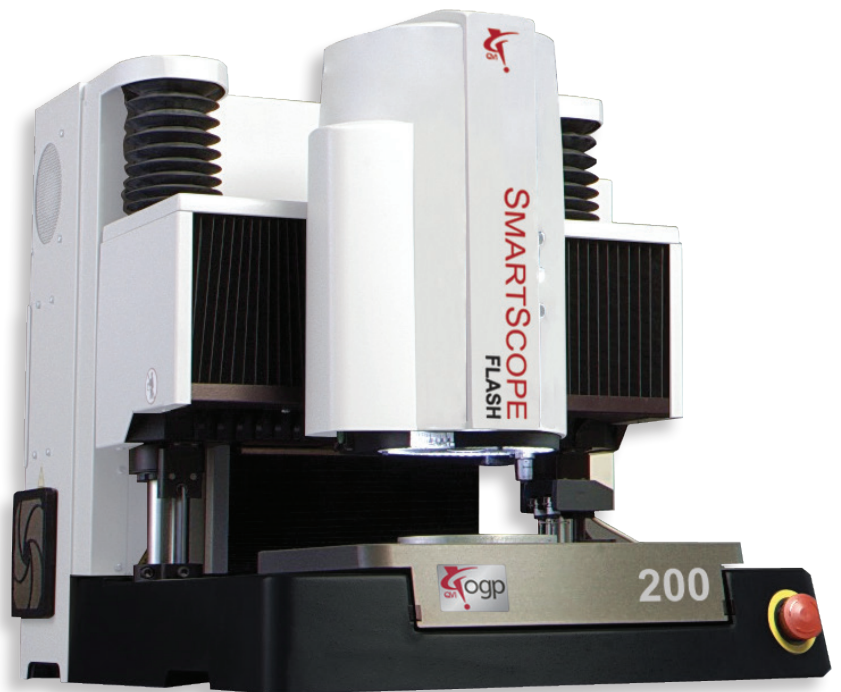


Shown with optional touch probe & QVI TTL laser

SmartScope® Flash 200

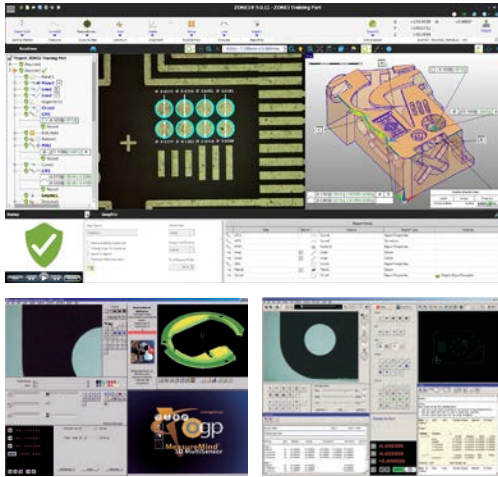

Choose the metrology software best suited to your manufacturing setting — ZONE3®, MeasureMind® 3D or Measure-X®.

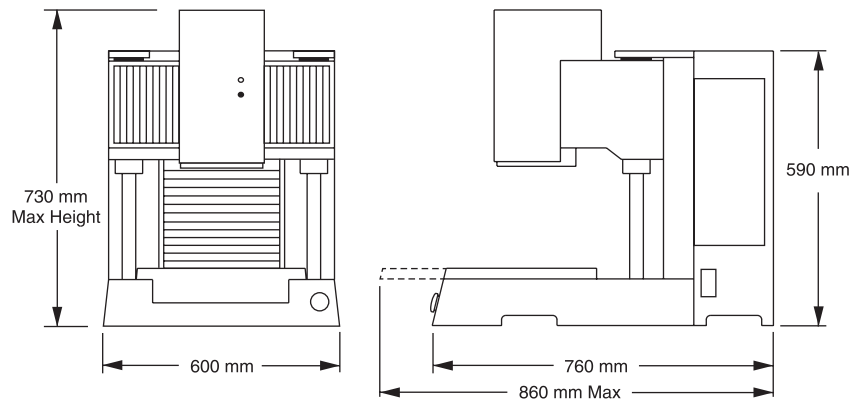

System Weight: 100 kg
Shipping Weight: 150 kg

	Standard	Optional
XYZ Travel	200 x 200 x 150 mm	
XYZ Scale Resolution	0.1 µm, with dual Z-axis scales standard	
Drive System	DC servo with 4-axis control (X,Y,Z,zoom); with multifunction handheld controller	
Worktable	Hardcoat anodized, with fixture holes, removable stage glass, 16 kg recommended max payload	
Rotary Axis		Miniature Servo Rotary (MSR), MicroTheta Rotary (MTR)
Optics*	AccuCentric® auto-compensating zoom with up to 25 calibrated positions, 1.0x lens	Focus Grid Projector: LED Source Laser Adapter: Allows for field retrofit of TTL Laser. Includes Laser Pointer Replacement Lenses: 2.5x, 5.0x Laser Lenses: 2.0x (Included with TTL Laser), 5.0x Lens Attachments for 1.0x Lens: 0.5x, 0.75x, 1.5x, 2.0x
FOV Range	8.0 mm x 6.0 mm (low zoom) to 0.90 mm x 0.68 mm (high zoom)	14.6 mm x 10.9 mm (1.0x lens, 0.5x attachment) to 0.19 mm x 0.14 mm (5.0x lens)
Working Distance	64 mm	Up to 97 mm (1.0x lens, 0.5x attachment)
Illumination	LED numerical aperture matching substage, LED coaxial TTL surface, 8 sector/8 ring SmartRing™ LED (white)	<ul style="list-style-type: none"> Flexible SmartRing light for long working distance optical configurations Red or green SmartRing light
Camera	Color digital metrology camera	
Image Processing	256 level grayscale processing with 10:1 subpixel resolution	
Sensor Options**		Tactile: TP20 or TP200 Touch Probe, SP25 Scanning Probe, Feather Probe™ Non-Contact: Through-the-Lens (TTL) Laser
Controller	Windows® based, with up-to-date processor and on board networking/communication ports	
Controller Accessory Package		24" flat panel, or dual 24" flat panel LCD monitors; keyboard, 3-button mouse (or user supplied)
Software	<ul style="list-style-type: none"> Choice of ZONE3 Express or Measure-X or MeasureMind 3D metrology software QVI Portal 	Metrology software: ZONE3 Prime, ZONE3 Pro Productivity software: MeasureFit® Plus, SmartFit® 3D, SmartProfile®, E-SPC Offline software: ZONE3, MeasureMind 3D, Measure-X
Power Requirements	100-120 VAC or 200-240 VAC, 50/60 Hz, 1 phase, 600 W	
Operating Environment, Safe Operation	15-30 °C	
Rated Environment	Temperature 18-22 °C, stable to ±1 °C, max rate of change 1 °C / hour, max vertical gradient of 1 °C / meter; 30-80% humidity; vibration <0.001g below 15 Hz	
XY Area Accuracy	$E_2 = (2.0 + 6L/1000) \mu\text{m}$	
Z Linear Accuracy	$E_1 = (3.5 + 6L/1000) \mu\text{m}$	$E_1 = (2.5 + 6L/1000) \mu\text{m}$ (requires optional TTL Laser, or touch probe)

Accuracy is evaluated with a QVI verification procedure where "L" is measured length in millimeters. Specifications apply within the rated environment. Standard optical specifications apply at the maximum optical magnification of the standard configuration. XY Accuracy applies with an evenly distributed load up to 5 kg in the standard measuring plane. The standard measuring plane is defined as a plane that is within 25 mm of the worktable surface. Depending on load distribution, accuracy at maximum payload may be less than standard.

*Lenses and lens attachments can be manually interchanged to change magnification and working distance. **SP25 only supported in ZONE3. Feather Probe only supported in ZONE3 and MeasureMind 3D.



Optical Gaging Products, a division of Quality Vision International
850 Hudson Avenue • Rochester, NY 14621 • USA
Phone: (585) 544-0400 • (800) 647-4243 • Fax: (585) 544-8092
info@ogpnet.com
www.ogpnet.com